

IPC-B150H(-M) 5 MP IR Fixed Network Bullet Camera



Key Features

- 1/2.7" progressive scan CMOS
- 2560 × 1920@15fps
- 2.8 mm/4 mm/6 mm fixed lens
- H.265+, H.265, H.264+, H.264
- Dual stream
- 3D DNR (Digital Noise Reduction)
- Up to 30 m IR range
- PoE (Power over Ethernet)
- IP67




| Camera | |
|---|--|
| Image Sensor | 1/2.7" progressive scan CMOS |
| Min. Illumination | Color: 0.01 Lux @(F1.2, AGC ON), 0.028 lux@(F2.0, AGC ON) |
| Shutter Speed | 1/3 s to 1/100, 000 s |
| Slow Shutter | Yes |
| Auto-Iris | No |
| Day & Night | IR cut filter |
| DNR (Digital Noise Reduction) | 3D DNR |
| WDR (Wide Dynamic Range) | 120 dB |
| Angle Adjustment (Bracket) | Pan: 0° to 360°, tilt: 0° to 180°, rotation: 0° to 360° |
| Lens | |
| Focal Length | 2.8 mm, 4 mm, 6 mm |
| Aperture | F2.0 |
| Focus | Fixed |
| FOV | 2.8 mm, horizontal FOV 100°, vertical FOV 74°, diagonal FOV 130° 4 mm, horizontal FOV 75°, vertical FOV 55°, diagonal FOV 98° 6 mm, horizontal FOV 49°, vertical FOV 37°, diagonal FOV 60° |
| Lens Mount | M12 |
| IR | |
| IR Range | Up to 30 m |
| Wavelength | 850 nm |
| Compression Standard | |
| Video Compression | Main stream: H.265/H.264 Sub stream: H.265/H.264/MJPEG |
| H.264 Type | Baseline Profile/Main Profile/High Profile |
| H.264+ | Main stream supports |
| H.265 Type | Main Profile |
| H.265+ | Main stream supports |
| Video Bit Rate | 32 Kbps to 8 Mbps |
| Smart Feature-set | |
| Region of Interest | 1 fixed region for main stream and sub-stream |
| Image | |
| Max. Resolution | 2560 × 1920 |
| Main Stream Max. Frame Rate | 50Hz: 12.5fps (2560 × 1920), 20fps (2560 × 1440), 25fps (2304 × 1296, 1920 × 1280, 1280 × 720) 60Hz: 15fps (2560 × 1920), 20fps (2560 × 1440), 30fps (2304 × 1296, 1920 × 1280, 1280 × 720) |
| Sub-stream Max. Frame Rate | 50Hz: 25fps (640 × 480, 640 × 360, 320 × 240) 60Hz: 30fps (640 × 480, 640 × 360, 320 × 240) |
| Image Enhancement | BLC, 3D DNR |
| Image Settings | Saturation, brightness, contrast, sharpness, AGC, white balance adjustable by client software or web browser |
| Day/Night Switch | Auto, scheduled, day, night |
| * Note: The frame rate of the sub-stream cannot exceed the maximum frame rate of the current main stream. | |
| Network | |
| Network Storage | NAS (NFS, SMB/CIFS) |
| Alarm Trigger | Motion detection, video tampering alarm, illegal login, network disconnected, IP address conflicted, HDD error, HDD full |
| Protocols | TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, |

| | |
|-------------------------------|---|
| | SNMP, IGMP, 802.1X, QoS, IPv6 UDP, Bonjour |
| General Function | Heartbeat, mirror, password protection, privacy mask, watermark, IP address filter |
| Firmware Version | 5.5.52 |
| API | ONVIF (PROFILE S, PROFILE G), ISAPI |
| Simultaneous Live View | Up to 6 channels |
| User/Host | Up to 32 users 3 levels: Administrator, Operator, and User |
| Client | HiLookVision PC Client, HiLookVision App |
| Web Browser | IE8+, Chrome 41.0-44, Firefox 30.0-51, Safari 8.0-11 |
| Interface | |
| Communication Interface | 1 RJ45 10M/100M self-adaptive Ethernet port |
| General | |
| Operating Conditions | -30 °C to 60 °C (-22 °F to 140 °F), humidity: 95% or less (non-condensing) |
| Power Supply | 12 VDC ± 25%, 5.5 mm coaxial power plug PoE (802.3af, class 3) |
| Power Consumption and Current | 12 VDC, 0.5 A, Max: 5 W PoE: (802.3af, 36 V to 57 V), 0.2 A to 0.1 A, Max: 6.5 W |
| Protection Level | IP67 |
| Material | Without –M model: Front cover: metal, back cover: plastic, bracket: plastic With –M model: Front cover: metal, back cover: metal, bracket: metal |
| Dimensions | Camera: Without –M model: Ø 70 mm × 191.3 mm (Ø 2.7" × 7.5") With –M model: Ø 71.4 mm × 181.4 mm (Ø 2.8" × 7.1") With package: 216 mm × 121 mm × 118 mm (8.5" × 4.8" × 4.6") |
| Weight | Without –M model: Camera: approx. 300 g (0.7 lb.) With package: approx. 500 g (1.1 lb.) With –M model: Camera: approx. 400 g (0.9 lb.) With package: approx. 600 g (1.3 lb.) |

Available Models

IPC-B150H (2.8/4/6 mm), IPC-B150H-M (2.8/4/6 mm)

Dimension

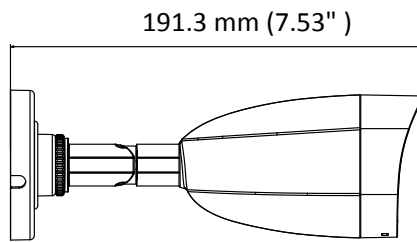

Accessory



HIA-J101
Junction Box